

TECHNICLE SPECIFICATION


CHARACTERISITICS	EURO STANDARD	VALUE
DIMENSION & SURFACE QUALITY		
DIMENSION & SURFACE QUALITY DEVIATION IN THICKNESS STRAIGHTNESS OF SIDES RECTANGULARITY SURFACE FLATNESS SURFACE QUALITY	± 0.5% ± 0.6mm ± 0.3% ± 0.5% ± 0.5% MIN 95%	± 0.2% ± 0.2mm ± 0.2% ± 0.3% ± 0.3% MIN 96%
PHYSICAL PROPERTIES		
WATER ABSORPTION BEND STRENGTH SCRATCH HARDNESS (MOHS) CRAZING	> 10% > 150Kg./cm ² MIN 3 1 CYCLE	> 14 - 17 % > 200-250kg./cm ² MIN 3 NO CRAZING AT 2 CYCLE
CHEMICAL PROPERTIES		
STAINING RESISTANCE HOUSEHOLD CHEMICAL	MIN CLASS 2 MIN CLASS B	RESISTANCE TO ALL ACIDS AND ALKALIES & HOUSEHOLD CHEMICALS EXCEPT HYDRO FLURIC ACID
THERMAL PROPERTIES		
THERMAL SHOKE THERMAL EXPANSION	RESISTANT TO 10 CYCLE MAX-9E-06	CONFORMS CONFORMS

PACKING DETAIL

Dimension (mm)	Tile Per Box (pcs)	Area Coverage per Box (Sq. ft.)Approx	Area Coverage per Box (Sq. m.)Approx	Weight per Box (Kg.)Approx	Thickness (mm)Approx
108 x 108 mm	80	10.04	0.933	10.500	5.80
150 x 150 mm	44	10.65	0.99	10.500	6.00
100 x 200 mm	50	10.76	1.00	12.500	7.50
200 x 200 mm	25	10.76	1.00	10.500	6.00
100 x 300 mm	33	10.65	0.99	13.800	7.50
100 x 400 mm	25	10.76	1.00	13.800	8.00

Note : ■ Size / shade variation is inherent in ceramic tiles , in case of any complain its should be brought to our dealer's notice before laying the tiles.
 ■ colour shown are indicative only. Check actual tiles for exact colour.
 ■ The information contained in this catalogue are accurate as possible, but cannot be considered as legally binding.
 ■ Customers are advised to inspect a sample of the tile before ordering.
 ■ The company reserves the right to change the specifications without prior notice.

Exterior Elevation or interior Walls

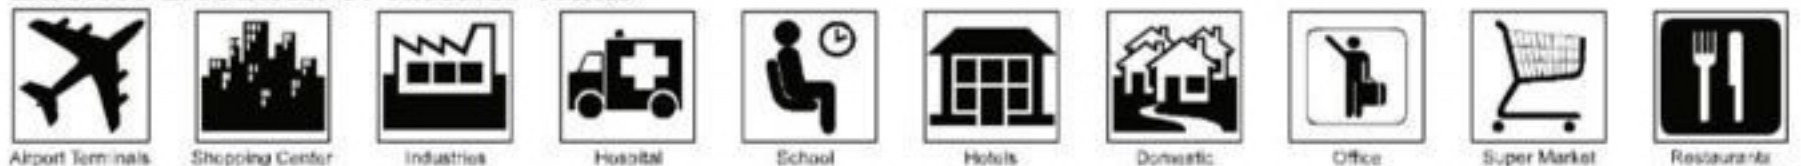

Airport Terminals

Shopping Center

Industries

Hospital

School

Hotels

Domestic

Office

Super Market

Restaurants

PARTNER